



resicon ITS - steel



Description :


Internally threaded sockets for use with any of our injection and pourable resin systems, designed for bonding in masonry and concrete where an internal thread is required allowing the use of standard metric fasteners. Particularly suitable for temporary works and applications requiring a low profile finish where projecting studs may be a hazard. Available in zinc plate and yellow passivated steel or high quality A4-316-80 grade stainless steel for maximum strength and corrosion protection.

Material : Grade 5.8 carbon steel
 Finish : Bright zinc plated and yellow passivated
 Tensile strength (nom) : 500N/mm²

Material : Grade A4-316 stainless steel
 Finish : Self colour
 Tensile strength (nom) : 800N/mm²

socket data

Internal thread diameter : mm (a)	Outside diameter : mm (d)	Anchor length : mm (l)	Internal thread length : mm (b)	Required drill hole diameter : mm	Required drill depth : mm
M8	12	90	30	14	95
M10	16	90	35	18	95
M12	20	90	40	22	95
M16	25	125	40	28	130
M20	30	150	60	35	155
M24	35	210	70	40	215
M30	45	280	90	50	285

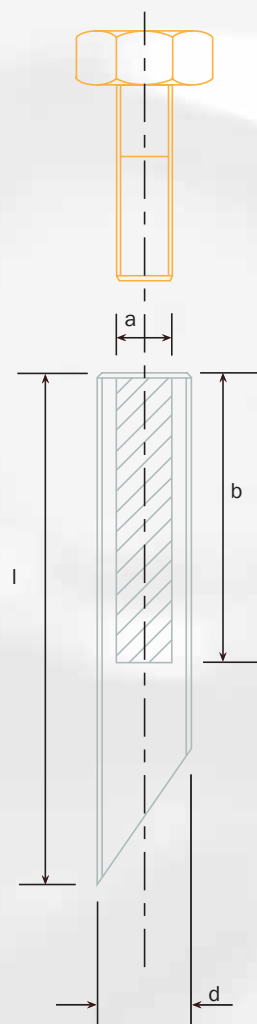

ordering information

product code	description	size : mm	box qty
ANC503	resicon its Gr5.8 ZYP	M8	10
ANC504	resicon its Gr5.8 ZYP	M10	10
ANC505	resicon its Gr5.8 ZYP	M12	10
ANC506	resicon its Gr5.8 ZYP	M16	10
ANC507	resicon its Gr5.8 ZYP	M20	1
ANC508	resicon its Gr5.8 ZYP	M24	1
ANC509	resicon its Gr5.8 ZYP	M30	1
ANC514	resicon its Gr A4-316	M8	10
ANC515	resicon its Gr A4-316	M10	10
ANC516	resicon its Gr A4-316	M12	10
ANC517	resicon its Gr A4-316	M16	10
ANC518	resicon its Gr A4-316	M20	1
ANC519	resicon its Gr A4-316	M24	1
ANC520	resicon its Gr A4-316	M30	1