


resicon ITSL - steel



Description :

Internally threaded sleeves for use either independently for bonding into solid masonry and concrete or in conjunction with nylon sleeves to provide an internal thread, allowing the use of standard metric fasteners, in perforated and hollow brickwork and blockwork using resicon2 injection resin.

Material : Grade 5.8 carbon steel
 Finish : Bright zinc plated and yellow passivated
 Tensile strength (nom) : 500N/mm²

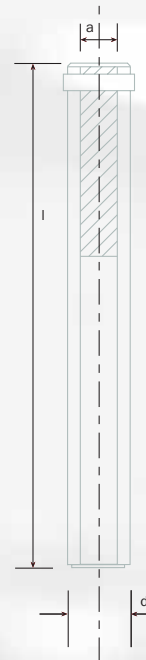

ordering information

product code	description	size : mm	box qty
ANC525	resicon itsl Gr5.8 ZYP	M6	10
ANC526	resicon itsl Gr5.8 ZYP	M8	10
ANC527	resicon itsl Gr5.8 ZYP	M10	10
ANC528	resicon itsl Gr5.8 ZYP	M12	10

socket data

Internal thread diameter : mm (a)	Outside diameter : mm (d)	Anchor length : mm (l)	Required drill dia without sleeve : mm	Required drill depth without sleeve : mm	Suit sleeve
M6	8	50	10	60	ANC529
M8	12	80	14	90	ANC530
M10	14	80	16	90	ANC530
M12	16	80	18	90	ANC531

resicon reinforcement sleeves




Description :

Galvanised steel wire mesh injection sleeves for use with injection resins to provide support and reinforcement for hollow material applications, damaged drill holes, substrates of unknown quality and deep drill holes and cavities.

Supplied in 1 metre lengths for cutting and forming on site.

sleeve data

Size : mm	Drill diameter : mm (d)	Suit stud diameters : mm
11	12	up to M8
15	16	up to M12
20	22	up to M16

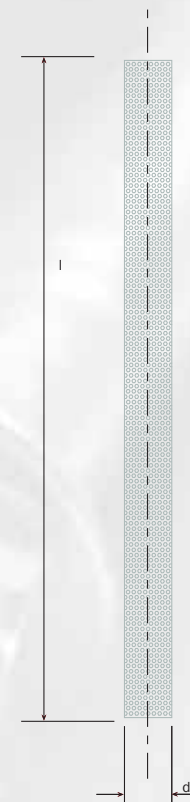

ordering information

product code	description	size : d x l	box qty
ANC533	resicon reinforcement sleeve	11 x 1000mm	1
ANC534	resicon reinforcement sleeve	15 x 1000mm	1
ANC535	resicon reinforcement sleeve	20 x 1000mm	1